


Please take note of the fact that this drawing is an opinion of the estimator. Before proceeding with construction all items should always be confirmed by the builder.

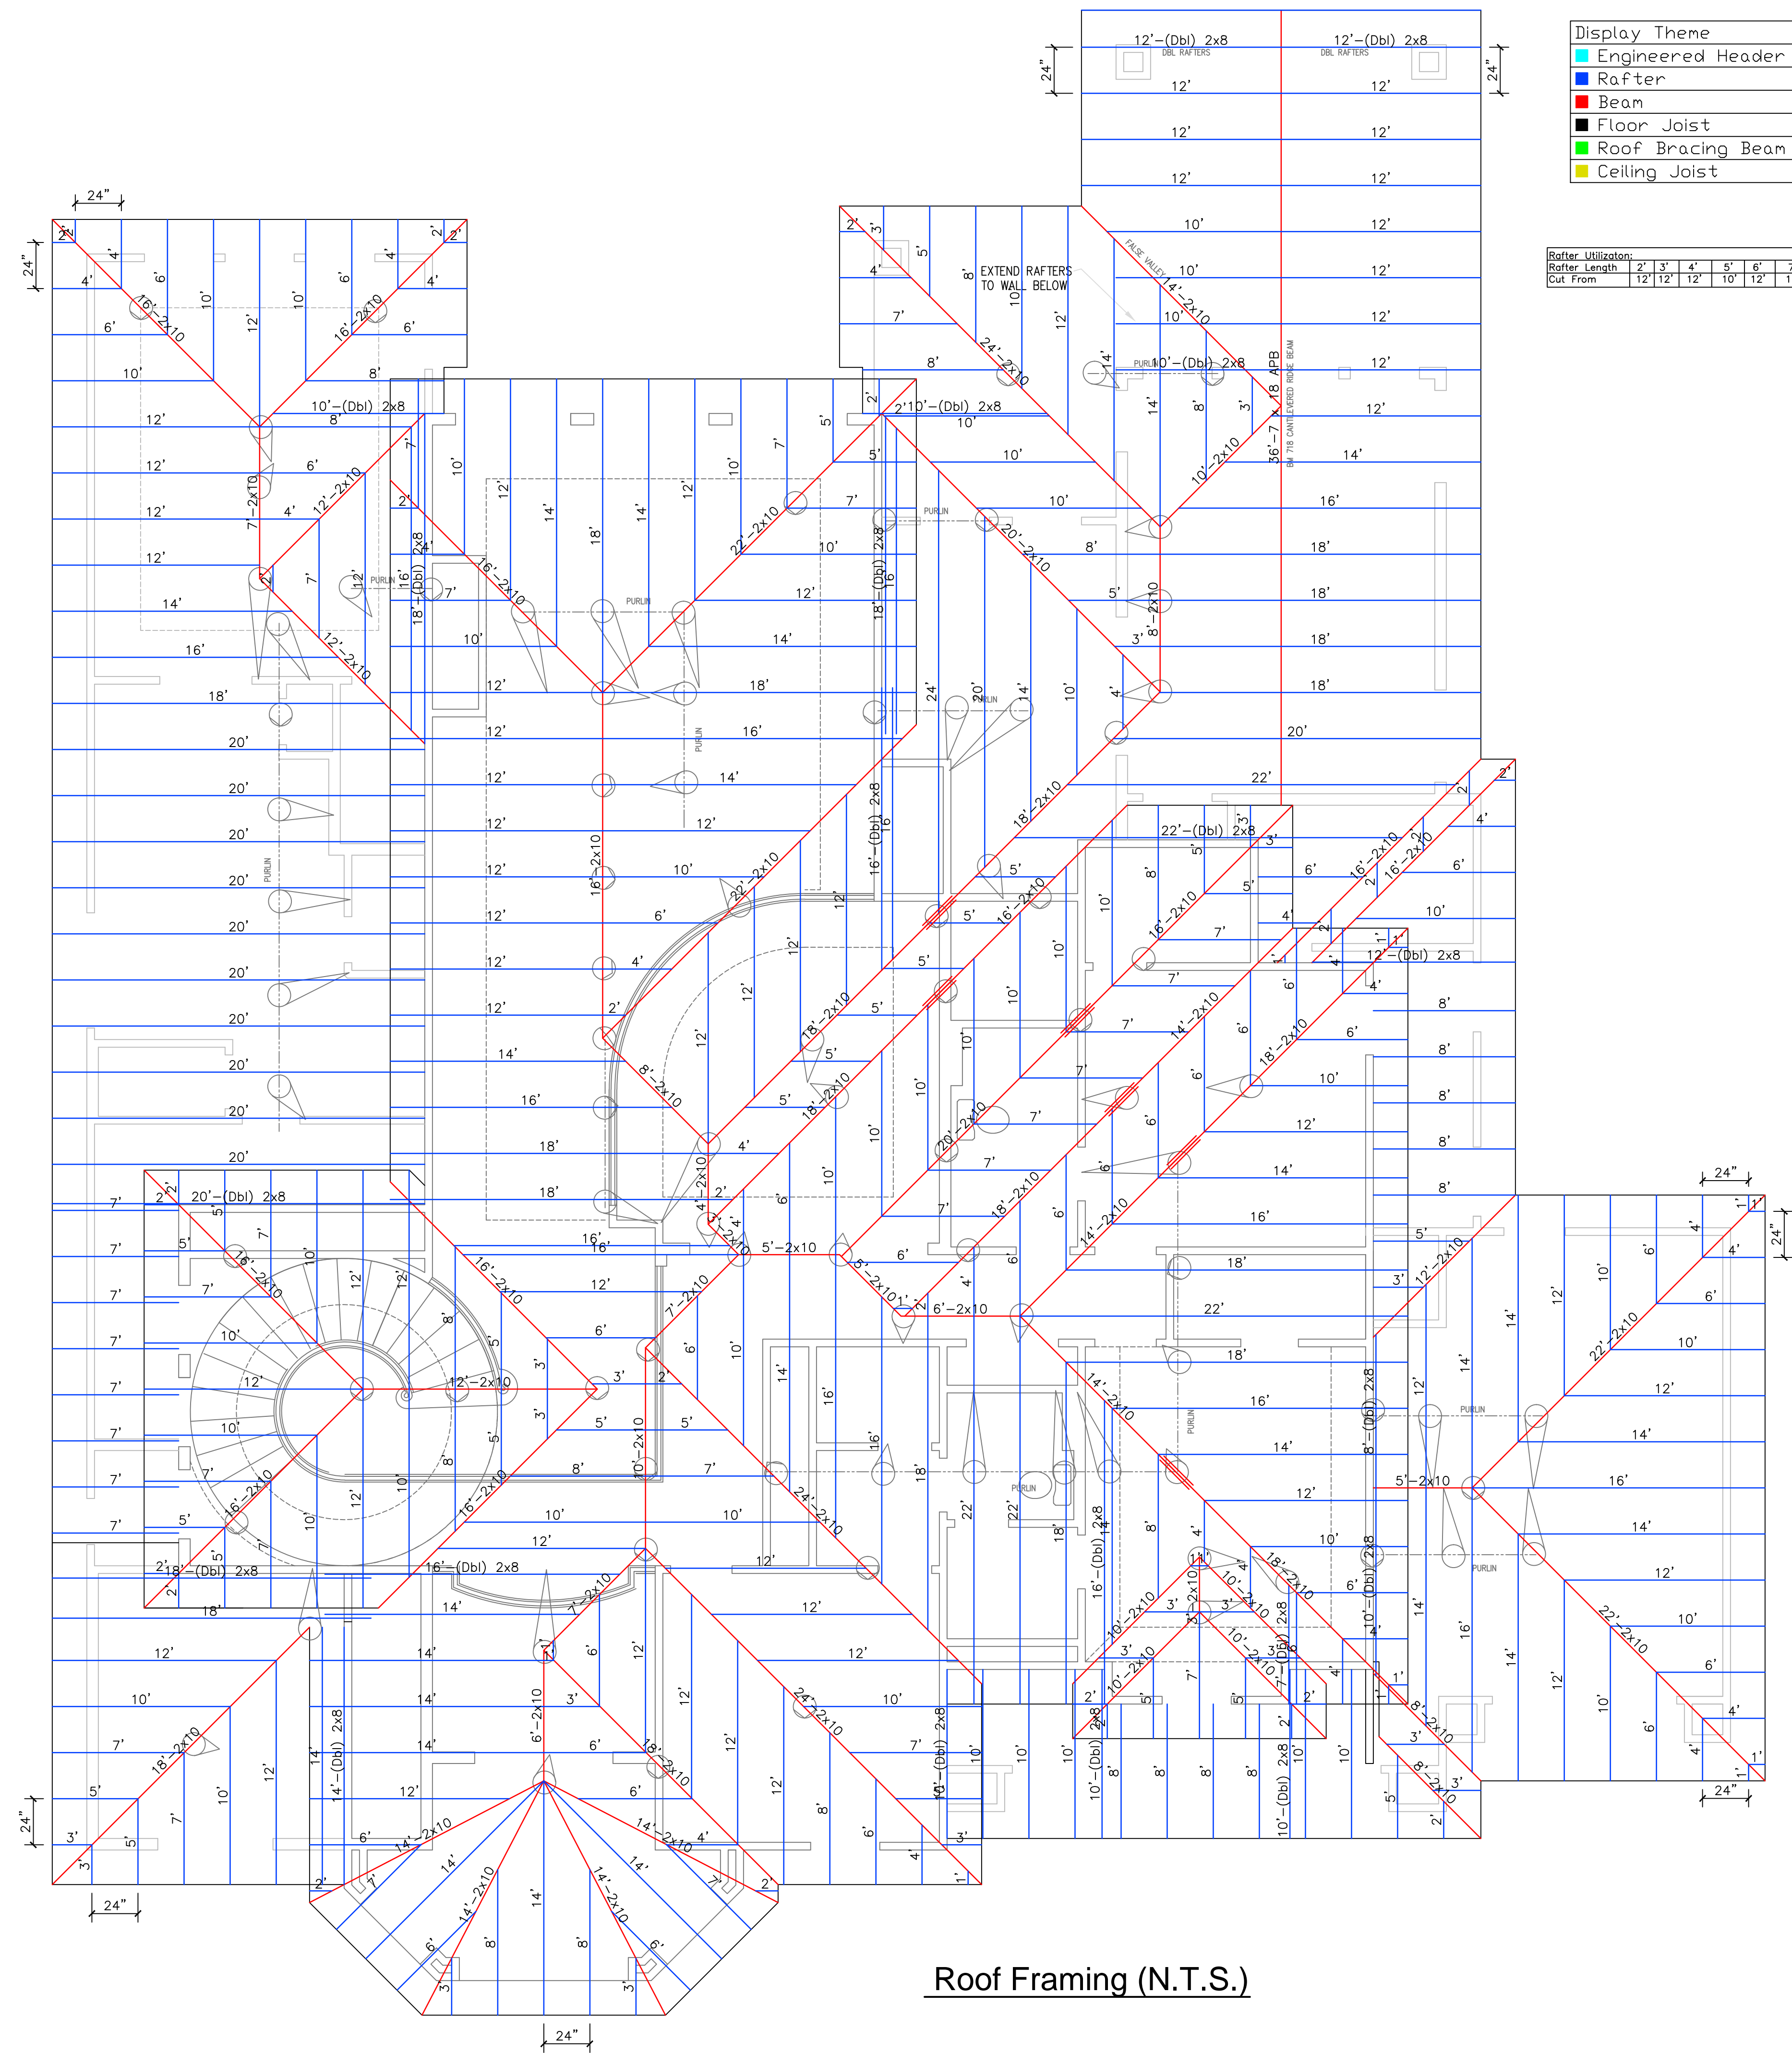

Display Theme

- Engineered Header
- Rafter
- Beam
- Floor Joist
- Roof Bracing Beam
- Ceiling Joist

Rafter Utilization:

Rafter Length	2'	3'	4'	5'	6'	7'
Cut From	12'	12'	12'	10'	12'	14'

Frame: 3

Hips, Ridges, & Valleys	Description	Qty	Unit
Hip & Ridge Beams	2 X 10 #3 SYP S4S	4	Pieces
Hip & Ridge Beams	2 X 10 X 10 #3 SYP S4S	8	Pieces
Hip & Ridge Beams	2 X 10 X 12 #3 SYP S4S	8	Pieces
Hip & Ridge Beams	2 X 10 X 14 #3 SYP S4S	10	Pieces
Hip & Ridge Beams	2 X 10 X 16 #3 SYP S4S	12	Pieces
Hip & Ridge Beams	2 X 10 X 18 #3 SYP S4S	8	Pieces
Hip & Ridge Beams	2 X 10 X 20 #3 SYP S4S	2	Pieces
Hip & Ridge Beams	2 X 10 X 22 #3 SYP S4S	4	Pieces
Hip & Ridge Beams	2 X 10 X 24 #3 SYP S4S	3	Pieces
Hip & Ridge Beams	7 X 18 APB	1	30'-0"

Rafters	Description	Qty	Unit
Rafters	2 X 8 X 8 #3 SYP S4S	26	Pieces
Rafters	2 X 8 X 10 #3 SYP S4S	75	Pieces
Rafters	2 X 8 X 12 #3 SYP S4S	100	Pieces
Rafters	2 X 8 X 14 #3 SYP S4S	48	Pieces
Rafters	2 X 8 X 16 #3 SYP S4S	22	Pieces
Rafters	2 X 8 X 18 #3 SYP S4S	21	Pieces
Rafters	2 X 8 X 20 #3 SYP S4S	14	Pieces
Rafters	2 X 8 X 22 #3 SYP S4S	6	Pieces
Rafters	2 X 8 X 24 #3 SYP S4S	1	Pieces
Purlins	2 X 8 X 16 #3 SYP S4S	28	Pieces
Bracing	2 X 4 RL #3 SPF	1848	Lineal Feet


  

Windstorm	Description	Qty	Unit
Simpson Connecto	Hurricane Rafter Tie H2 G (100box)	6	Boxes
Simpson Connecto	Simpson HIT5	18	Pieces
Simpson Connecto	Simpson Coil Strap CS16 (150')	1	Roll
Simpson Connecto	5/8" Epoxy Wedge Anchor Bolt w/Nut & Was	18	Pieces
Shearwall Sheath	4 X 8 X 7/16" OSB	57	Pieces

Roof Framing (N.T.S.)

Roofers: 2x6 #3 SYP 24" O.C. UNO  
 Ceiling Joists: 2x6 #2 SYP 24" O.C. UNO  
 Floor Joists: Engineered Joists UNO  
 Builder: Best Builder Custom Homes  
 Address: 1734 Upper Spruce Rd  
 City: Houston, TX  
 Wonderful Estates

Trophy Estimates  
 281-893-3444

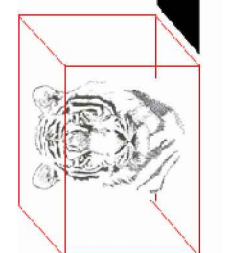

Made in USA